



Model 2734 ER


4 Wire Earth Resistance Tester



- Microprocessor-controlled with advanced safety features.
- 4-wire testing only.
- Automatic C spike check.
- Auto power-off.
- Auto data hold.
- Large LCD (2000 counts).
- Protective terminal cover.

Specifications

Measuring ranges	Earth Resistance: 0-20Ω / 0-200Ω / 0-2000Ω Earth Voltage: 0-200V AC
Accuracy	Earth Resistance: ±2%rdg±3dgt Earth Voltage: ±2%rdg±3dgt
Earth resistance resolution	0-20Ω : 0.01Ω 0-200Ω : 0.1Ω 0-2000Ω : 1Ω
Temperature & humidity	Operating: 0°C~40°C ≤80% R.H. Storage: -10°C~50°C ≤80% R.H.
Dimensions	205(L) x 90(W) x 55(D)mm
Weight (battery included)	Approx. 380g
Power source	1.5V (AA) x 6
Safety standards	EN 61010-1 CAT IV 200V EN 61326-1 EN 61557-1 EN 61557-5

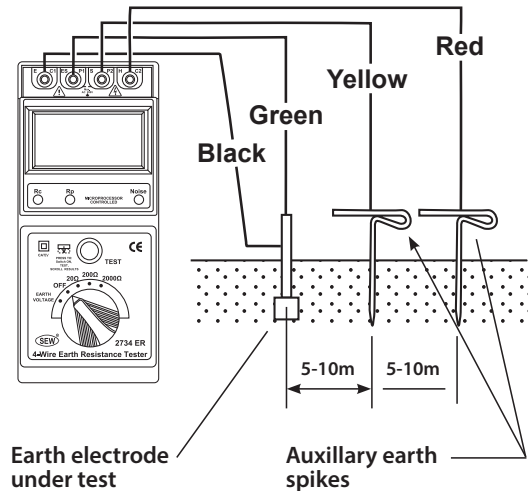

Accessories

Test leads
(red-15m, black-10m,
yellow 10m, green-5m)

Auxillary spike
Carrying case
Batteries

Instruction Manual



Test lead & reel x4



Auxillary spike x2



Carrying case

Hoyt Electrical Instrument Works, Inc.

23 Meter Street
Penacook, NH 03303

Phone: (800) 258-3652
Fax: (603) 753-9592
Email: sales@hoytmeter.com

www.hoytmeter.com