




AL-30, AL-30A, AL-30F

Test Leads

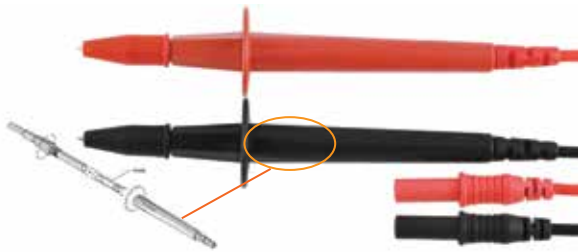

CE

AL-30, AL-30F

Specifications

- The spring-shrouded 4mm brass caged banana probe tip.
- Double insulated silicone wire 1m.
- Safety straight input plug.
- Rating : EN 61010-31:2002 + A1:2008
CAT III 1000V 10A

AL-30R Red

AL-30B Black

AL-30G Green.

- AL-30F is the fused version for AL-30.
Fuse size : 6x32mm
Rating : EN 61010-031:2002 + A1:2008
CAT III 250V 10A / 500V 10A / 690V 2A

AL-30FR Red

AL-30FB Black.



CE

AL-30A

Specifications

- Wide grip alligator clips with integral finger guard, large 35mm high tension spring mouth.
 - Double insulated silicone wire 1m.
 - Safety straight input plug.
 - Rating : EN 61010-031:2002 + A1:2008 CAT III 1000V 10A
- AL-30AR Red
AL-30AB Black
AL-30AG Green
AL-30AL: 90° angle 4mm banana plug.