



# 52F Series

## Test Leads




### 52F Series Test Leads



#### Specifications

- Terminal : 4mm banana plug
- Wire: PVC UL 1803 or silicone  
Length : 1000±30mm  
Out diameter: 4mm  
Braid copper wires (170 of 0.08mm)
- Remove test lead cap for attaching alligator clips
- Rating : EN 61010-031:2002 + A1:2008  
CAT IV 1000V 0.5A / CAT IV 690V 2A  
CAT IV 500V 10A / CAT IV 250V 10A

Terminal Type

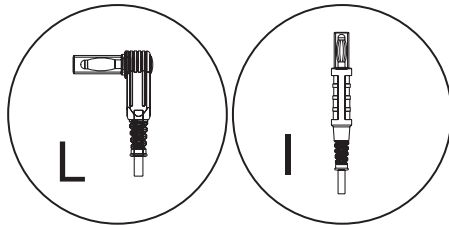

Probe Tip

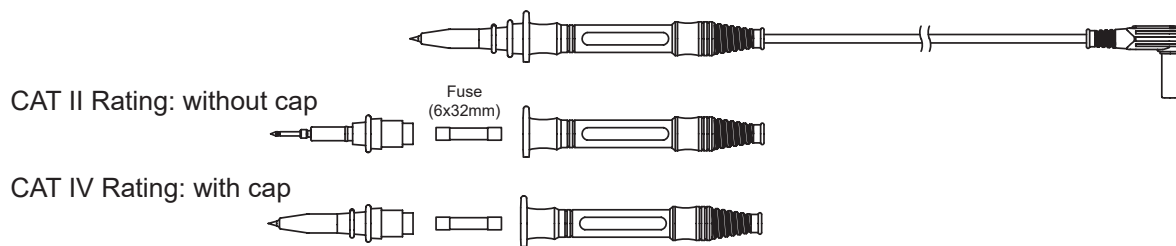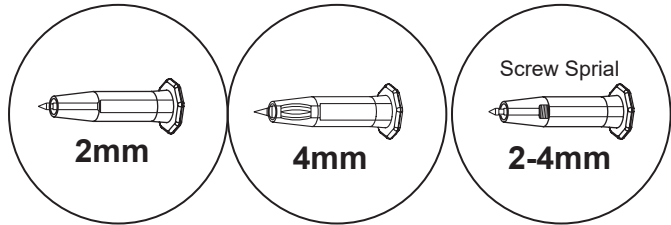

| Model      | L=Terminal | X=tip(mm) | Y=Fuse Rating   | Z=Voltage Rating                      | Wire(Optional)            |
|------------|------------|-----------|---|---------------------------------------|---------------------------|
| 52F-LX-YAZ | L          | 2         | 250V Fuse Rating 0.5-10A<br>500V Fuse Rating 0.5-10A<br>690V Fuse Rating 0.5-2A<br>1000V Fuse Rating 0.5A | 1=250V<br>2=500V<br>3=690V<br>4=1000V | Silicone Wire<br>PVC Wire |
|            | L          | 4         |   |                                       |                           |
|            | L          | 2-4       |   |                                       |                           |
| 52F-IX-YAZ | I          | 2         |   |                                       |                           |
|            | I          | 4         |   |                                       |                           |
|            | I          | 4         |   |                                       |                           |

X=2,4,2-4 (tip type)

Y=0.5-10 (fuse rating)

Z=1-4 (voltage rating)

**Hoyt Electrical Instrument Works, Inc.**

23 Meter Street  
Penacook, NH 03303

Phone: (800) 258-3652  
Fax: (603) 753-9592  
Email: sales@hoytmeter.com

[www.hoytmeter.com](http://www.hoytmeter.com)