



HST-70u

Analog Meters



Size: 2.5" Square

FEATURES

- UL listed, UL File No. E486912, CE Approved, ANSI C39.1
- Acrylic resin front and black bakelite case with white scale, black sword type pointer
- All AC & DC Iron Vane $\pm 2.0\%$ of Full Scale
All AC rectifier Type $\pm 3.0\%$ of Full Scale
All Frequency Type ± 0.3
- Overload: All AC & DC Voltmeters - 50% Momentary / 20% Prolonged
All AC & DC Ammeters - 50% Momentary / 20% Prolonged
All Frequency meters - 20% Maximum
- Burden: AC Ammeters - 0.5VA Maximum
- Frequency (Hz) meter measuring ranges: 45-65, 45-55, 55-65Hz
Rated Voltage: 120V, 240V
Accuracy: $\pm 2.0\%$
Consumption: Max. 15mA
Test Voltage: 2Kv, 50-60 Hz



AVAILABLE OPTIONS

- Panel Gaskets
- NEMA4
- Rectifier Movements (25-1000HZ)
- Improved Accuracy
- Colored Dials, Custom Artwork, Customer Logos, etc.
- Available as 3 stud or 4 stud mounting



DIMENSIONS

THREE STUD MOUNTING

DIMENSIONS IN INCHES

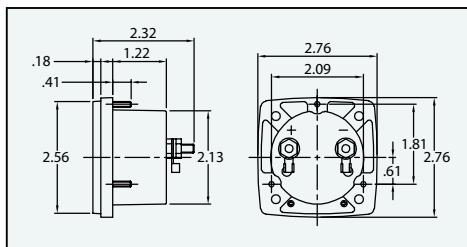



DIMENSIONS IN MILLIMETERS

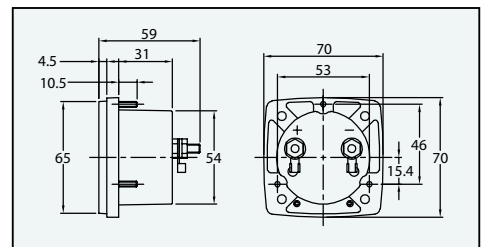

FOUR STUD MOUNTING

DIMENSIONS IN INCHES

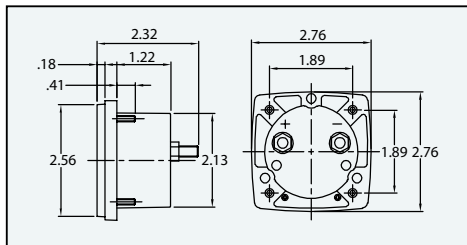

DIMENSIONS IN MILLIMETERS

