




# Model 2706 IM

## Audio Impedance Tester



CE

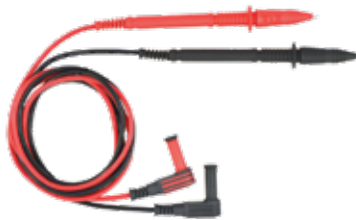

AL-24-5





AL-21C2-4

### Features

- True measurement of speaker systems actual impedance at 1kHz.
- Three test ranges (20Ω / 200Ω / 2000Ω) allow testing of home theater and commercial sound systems.
- Measures transformer impedances.
- Battery operated.
- Low battery indication.
- Data hold function.
- Timer function for continuous hands free operation.
- The timer can last about 3-5 minutes when users press.
- TEST ON/OFF button.

### Specifications

Measuring ranges	0-20Ω / 0-200Ω / 0-2000Ω
Test frequency	1kHz
Accuracy	20Ω : ± 2%rdg±2dgt or ± 0.1Ω, which is greater. 200Ω / 2000Ω : ± 2%rdg±2dgt
Low battery indication	 Symbol appears on the display
Data hold indication	 Symbol appears on the display
Display	LCD 3½ digit (2000 counts)
Dimensions	205(L) × 90(W) × 55(D)mm
Weight (battery included)	Approx. 530g
Power source	1.5V (AA) × 6
Safety standard	EN 61010-1 CAT III 300V EN 61326-1

### Accessories

Instruction manual  
Test leads  
Carry case  
Batteries