




54F Series Test Leads



Specifications

- Terminal : 4mm banana plug
- Probe tip : 2mm
- Wire: PVC UL 1803 or silicone
Length : 1100±30mm
Out diameter : 4mm
Braid copper wires (170 of 0.08mm)
- Rating :
EN 61010-031:2002 + A1:2008
CAT IV 1000V 0.5A / CAT IV 690V 2A
CAT IV 500V 10A / CAT IV 250V 10A


Terminal Type

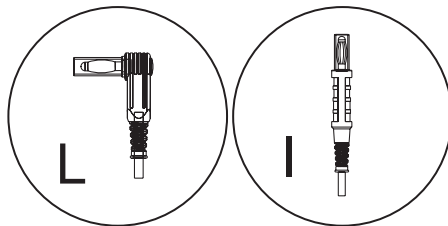

Probe Tip

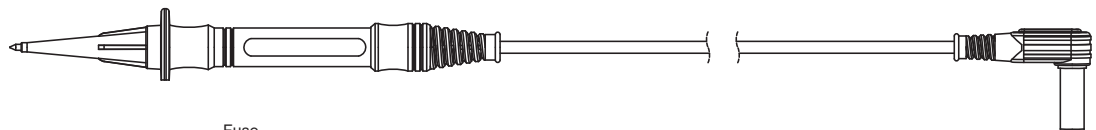

CAT IV Rating without cup



Model	Terminal Type	Fuse Rating	Voltage Rating
54F = PVC wire	L = right-angle plug	250V fuse rating 0.5~10A	1 = 250V
54FS = Silicone wire	I = straight plug	500V fuse rating 0.5~10A	2 = 500V
		690V fuse rating 0.5~2A	3 = 690V
		1000V fuse rating 0.5	4 = 1000V