



Model VOT-52

Voltage/Continuity Testers

IP65



CE

Features


- Voltage test: 12V to 1000V AC/DC (8 LEDs) with indication by buzzer.
- Voltage range: 12V, 24V, 50V, 120V, 230V, 400V, 750V, 1000V.
- Test leads positioned at 19mm apart.
- Interchangeable probe tip for 2mm and 4mm.
- Polarity test : LED +/-
- Audible continuity test.
- Phase rotation test : /
- Self-test button to ensure proper function of the device prior to testing.
- Waterproof design, protection class: IP65.
- Phase / Neutral identification.
- Rubberized double-molded housing.
- ELCB / RCD trip test.
- Flashlight function.

Specifications

Voltage test	12V to 1000V AC/DC
Voltage range	12V, 24V, 50V, 120V, 230V, 400V, 750V, 1000V
Working frequency	40 ~ 65 Hz
Voltage protection	1100V AC / DC
Continuity range	< 200kΩ
Phase rotation test range measure between 2 phases, instrument in hand	100V~1000V
Operating temperature	0 - 40°C
Operating humidity	80% R.H. Max.
Probe distance	19mm apart
Power source	1.5V (AAA) x 2
Dimensions	248(L) x 68(W) x 34(D)mm
Weight (battery included)	Approx. 215g
Safety standard	IEC/EN 61010-1 CAT III 1000V / CAT IV 600V IEC/EN 61243-3 EN 61326-1

Accessories

- Instruction manual
- Battery

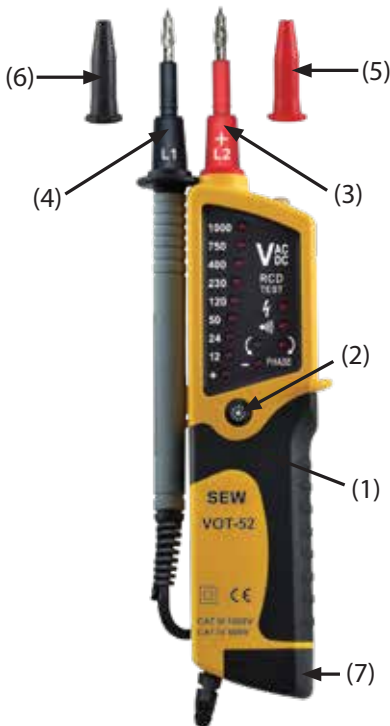

- (1) Rubberized injection housing
- (2) Flashlight & Self-test button
- (3) L2+, Red test probe
- (4) L1, Black test probe
- (5) Red protective cover
- (6) Black protective cover
- (7) Battery cover

Hoyt Electrical Instrument Works, Inc.

23 Meter Street
Penacook, NH 03303

Phone: (800) 258-3652
Fax: (603) 753-9592
Email: sales@hoytmeter.com

www.hoytmeter.com