



## Hoyt Test Equipment Accessories

### Adapters

AL11-C2 .....	1
AL11-C4 .....	1
AL11-C6 .....	1
TEL-AL11-C2 .....	2
TEL-AL11-C2 .....	2
S5K .....	3
S5F .....	3
AL-39C .....	3

### Alligator Clips

AL-19C .....	4
AL-20C .....	4
AL-21C .....	4
AL-23CA .....	5
AL-25C .....	5
AL-26C .....	6
AL-26CA .....	6

### Terminals

TER-6200 .....	7
TER-205 .....	7
TER-305 .....	7
TER-2000 .....	7

### Pouches / Holsters

CAC-860 B .....	8
CAC-855 B .....	8
CAC-1132 .....	8
CAC-2120 .....	8
CAC-1120 A .....	8
CAC-2700 A .....	8

### Pouches / Holsters

CAC-600 .....	8
CAC-3600 B .....	8
CAC-EARTH B .....	8
CAC-183 CB A .....	8
CAC-180 CB B .....	8
CAC-275 Y .....	8
CAC-2310 .....	8
CAC-TEL .....	8
CAC-3501 NO .....	8
CAC-VOT50 .....	8
CAC-HLV-3 .....	9
CAC-PT30 .....	9
CAC-CABLE .....	9
CAC-AL38 .....	9
CCO-2700 B .....	9
CCO-6400 .....	9
CAC-276 .....	9
CAC-276S .....	9
CAC-4EARTH .....	9
CAC-230 .....	9
CAC-290 .....	9
CAC-120 .....	9
CAC-120 B .....	9
CAC-175-7 .....	9

### Various Accessories

CA-232 .....	10
1026 AH .....	10

## AL-11 Series Adapters

### AL11-C2 Adapter

- Tip: 2-4 mm stainless steel, sharp tip.
- Red and Black each (set)
- Jack: nickel plated, 4mm banana jack.
- The probe tip could screw into crocodile clips.
- Probes can be used with all SEW 4mm jack test leads.
- Rating: EN 61010-031:2002 + A1:2008  
CAT IV 600V 15A / CAT III 1000V 15A



### AL11-C4 Adapter

- Tip: 4mm stainless steel caged banana probe tip.
- Red and Black each (set)
- Jack: nickel plated, 4mm banana jack.
- The probe tip could be used into non-screw crocodile clips.
- Probes can be used with all SEW 4mm jack test leads.
- Rating: EN/IEC 61010-031:2002 + A1:2008  
CAT IV 600V 15A / CAT III 1000V 15A




### AL11-C6 Adapter

- Tip: 2 mm
- Rating: EN 61010-031:2002 + A1:2008  
CAT IV 600V 15A / CAT III 1000V 15A




## TEL-AL-11 Series Adapters

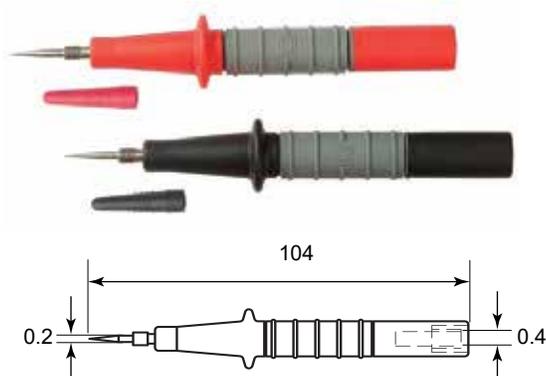

### TEL-AL11-C2 Adapter

- Tip: Stainless Steel, sharp tip.
- Red and Black each (set)
- Jack: Nickel Plated, 4mm banana Jack.
- The probe tip could screw into crocodile clips.
- Probes can be used with all SEW 4mm jack test leads.

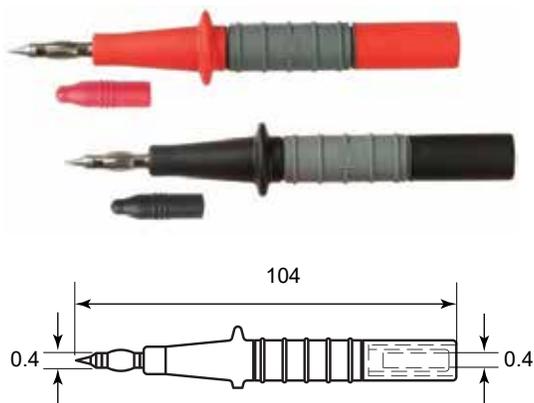

### TEL-AL11-C4 Adapter

- Tip: 4mm Stainless Steel caged banana probe tip.
- Red and Black each (set)
- Jack: Nickel Plated, 4mm banana Jack.
- The probe tip could be used into non-screw crocodile clips.
- Probes can be used with all SEW 4mm jack test leads.

## TEL-AL-11 Series Adapters



### S5K Adapter

- Material: Nylon
- Red and black each (set)
- Tip: Knife Stainless steel
- Jack: Nickel Plated, 4mm banana Jack.
- Probes can be used with all SEW 4mm jack test leads
- Rating: EN 61010-031:2002+A1:2008  
CAT IV 1000V 10A

CE



### S5F Adapter

- Material: Nylon
- Red and black each (set)
- Removable cap for attaching alligator clips
- Probes can be used with all SEW 4mm jack test leads.
- Rating: EN 61010-031:2002 + A1:2008  
CAT IV 1000V 0.5A/CAT IV 690V 2A  
CAT IV 500V 10A/CAT IV 250V 10A

CE




### AL-39C Adapter

Solid copper spade lug. Designed to fasten housing or screws for measurement.

Fully insulated, axial mount 4mm banana jack.

Designed especially for terminal posts,

The Y-shaped tip accepts housings or screws that have a diameter of 6.5mm or less.

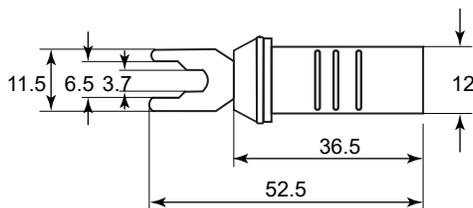

# Alligator Clips

CE



## AL-19C

- AL-19C-1 For 2mm probe tip
- AL-19C-3 For 4mm banana plug
- AL-19C-5 For 2mm probe tip (only for exposed 4mm probe tip)
- Rating: EN 61010-031:2002 + A1:2008  
CAT III 1kV 10A  
CAT IV 600V 10A

CE



## AL-20C

- AL-20C-1 For 2mm probe tip
- AL-20C-3 For 4mm banana plug
- AL-20C-5 For 4mm screw
- Rating: EN 61010-031:2002 + A1:2008  
CAT III 1kV 10A  
CAT IV 600V 10A



## AL-21C

For 4mm banana plug




## AL-21C 2-4

For 4mm screw

# Alligator Clips

CE

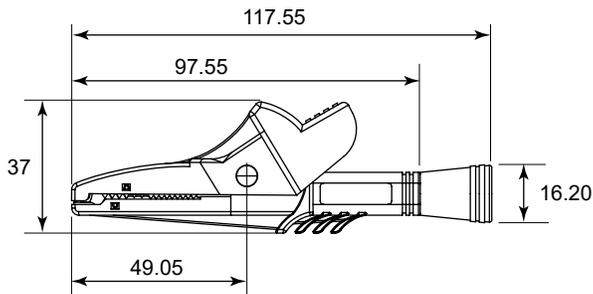


## AL-23CA

- For 4mm banana plug
- Rating: EN 61010-031:2002 + A1:2008  
CAT IV 1kV 20A

## AL-23CA 2-4

- For 4mm screw
- Rating: EN 61010-031:2002 + A1:2008  
CAT IV 1kV 20A

CE

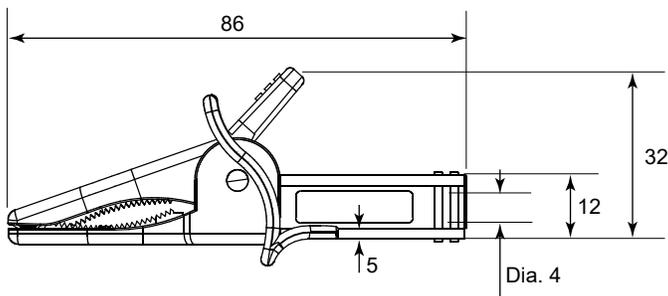

## AL-25C

- For 4mm banana plug
- Rating: EN 61010-031:2002 + A1:2008  
CAT III 600V 10A

## AL-25C 2-4

- For 4mm screw
- Rating: EN 61010-031:2002 + A1:2008  
CAT III 600V 10A


# Alligator Clips

CE



## AL-26C

- Probes can be used with all SEW 4mm jack test leads.
- Color: Red, Black.
- Rating: EN 61010-031 CAT III 600V 10A

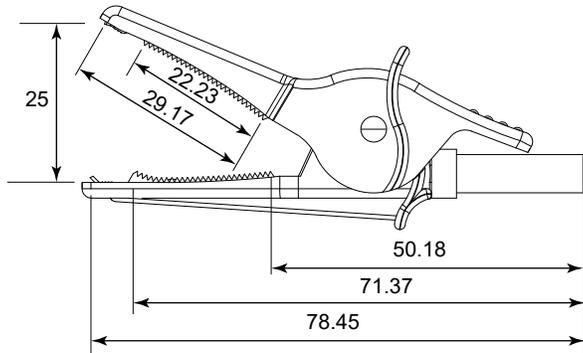


CE



## AL-26CA

- Probes can be used with all SEW 4mm jack test leads
- Color: AL-26CAB Black  
AL-26CAR Red  
AL-26CAG Green  
AL-26CABU Blue  
AL-26CAW White
- Rating: EN 61010-031: 2015 CAT III 600V 10A

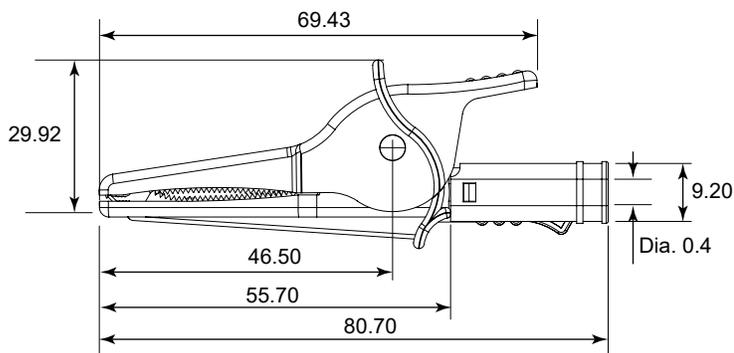



## TER-6200

- Sockets nylon
- 4 m/m sockets with shrouded contact compatible with shrouded plugs and leads supplied with nuts for panel mounting.
- TER-6200B Black
- TER-6200R Red
- TER-6200G Green



## TER-205

- 4 m/m sockets with insulated head and base for installation in unit.
- ABS resin head.
- TER-205B Black
- TER-205R Red



## TER-305

- 4 m/m banana socket captive head suitable for wire or pin-type test head bakelite material head and base.



## TER-2000

- 5 m/m captive head suitable for wire or pin-type test head bakelite material base.

# Soft Pouches / Holsters

 <p><b>CAC-860 B</b> 138×167×47mm</p>	 <p><b>CAC-855 B</b> 172×153×65mm</p>	 <p><b>CAC-1132</b> 190×140×75mm</p>	 <p><b>CAC-2120</b> 200×165×60mm</p>
 <p><b>CAC-1120 A</b> 202×135×155mm</p>	 <p><b>CAC-2700 A</b> 230×125×130mm</p>	 <p><b>CAC-600</b> 220×125×50mm</p>	 <p><b>CAC-3600 B</b> 257×141×65mm</p>
 <p><b>CAC-EARTH B</b> 240×138×47mm</p>	 <p><b>CAC-183 CB A</b> 245×165×66mm</p>	 <p><b>CAC-180 CB B</b> 260×115×51mm</p>	 <p><b>CAC-275 Y</b> 270×130×60mm</p>
 <p><b>CAC-2310</b> 240×90×40mm</p>	 <p><b>CAC-TEL</b> 190×93×35mm</p>	 <p><b>CAC-3501 NO</b> 125×98×35mm</p>	 <p><b>CAC-VOT50</b> 140×70×40mm</p>

# Soft Pouches / Holsters



**CAC-HLV-3**  
135×85×55mm



**CAC-PT30**  
195×50×35mm



**CCO-6400**  
For 6400DM 6410DM  
6420DM 6470TB



**CCO-2700 B**  
For 2700 series



**CAC-CABLE**  
For LVD-15 LVD-17



**CAC-AL38**  
For Alligator Adapter



**CAC-276S**  
300×55×55mm



**CAC-276**  
387×40×39mm



**CAC-120**  
1530×120mm



**CAC-230**  
1000×120mm



**CAC-175-7**  
1600×130mm



**CAC-120 B**  
1940×230mm



**CAC-4EARTH** 500×220×110mm

**CAC-290**  
1420×120mm

## CA-232 data transmission cable



- Optical USB to RS-232 data transmission cable.
- Well isolated to contact.
- Well surge protection.
- 2 optical LEDs are built-in for data transfer.
- Typical baud rate can reach up to 115200 bps (bits per second).
- Powered by the USB port, no external power adapter is required.
- SEW standard product for isolated data transfer.

## 1026 AH Accessories for Hot Sticks and HV Detectors



- Content: ADP-HS120, HOK-HS166, ADP-278
- Dimension of the carry case: 243(L) × 126(W) × 46(D) mm
- Weight of the whole set: Approx. 386g



- **ADP-HS120**  
Fuse extractor head  
Material: Nylon



- **HOK-HS166**  
Disconnect hook  
Material: Aluminum alloy



- **ADP-278**  
Shotgun adapter  
Material: Aluminum alloy