





DLA-30-DCA-200 DC Ammeter

Digital Panel Meter

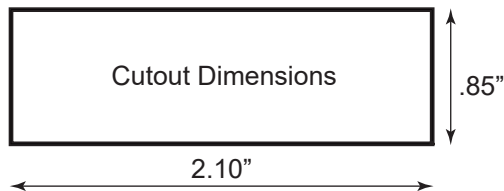

DC Volts

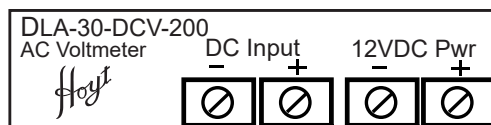

Range: 0 - 99.9VDC or 0 - 199VDC
(Specify)

Features

Digital DC Ammeter with 3.5 Digit red high intensity LED Display.
Range: 0-199 DC Volts
Completely Isolated. Field Adjustable.
Marine – Ideal for ship to shore panels.
Generators – Ideal for generator panels.

Specifications

Display

0.56" Red High Intensity digits with terminal blocks (isolated design).

Polarity: automatic, "-" displayed.

Overrange: three lower order digits blank
for inputs >1999 & <- 1999.

Performance:

0-199.9 DC Volts.

24VDC AUX Power.

Accuracy: ($\pm 0.05\%$ FS + 1 count).

Sample Rate: 3 readings per second.

Field Adjustable: single turn potentiometer for calibration.

Warmup: 10 minutes typical.

Temperature Coeff.: ± 100 PPM per $^{\circ}\text{C}$.

Power Supply:

Supply Voltage: 12-24VDC.

Environment:

Operating Range: -10 to 50°C

Storage Range: -40 to 75°C .

Connection:

Terminal Block Connections. Spade terminals.

NOTE: manufactured part numbers have changed. DMC-30-DCV-200 has been replaced by DLA-30-DCV-200.