



# Model 885 PR

## Phase Rotation Tester with Voltmeter

### Features

- 3 functions in one unit: Phase Rotation, Phase Presence, Voltmeter.
- LCD contact type Phase Rotation Tester.
- Large LCD to show phase rotation and phase presence.
- Check a wide range of three phase power sources.
- Voltage range for phase rotation test: 75~600V AC.
- Frequency range: 40~400Hz.
- 6000-count voltmeter.
- Auto ranging Voltmeter AC/DC.
- Data hold function.
- Auto power off.
- Convenient stand for viewing.
- Easy to use.

### Specifications

Voltage Range	75~600Vac
Frequency Range	40~400Hz
Circuit Structure	All electronic
Dimension	165(L) x 82(W) x 45(D)mm
Weight (battery included)	Approx. 245g
Power Source	1.5V (AAA) battery x 2
Display	LCD
Safety Standard	EN 61010-1 CAT III 600V EN 61010-2-033 EN 61326-1

### Voltmeter ACV


Range	Resolution	Accuracy
600mV	0.1mV	±(2.3% rdg+5dgt)
6V	1mV	
60V	10mV	
600V	0.1V	

### Voltmeter DCV

Range	Resolution	Accuracy
600mV	0.1mV	±(0.8% rdg+3dgt)
6V	1mV	
60V	10mV	
600V	0.1V	

### Accessories

- Instruction manual
- Batteries
- Test leads

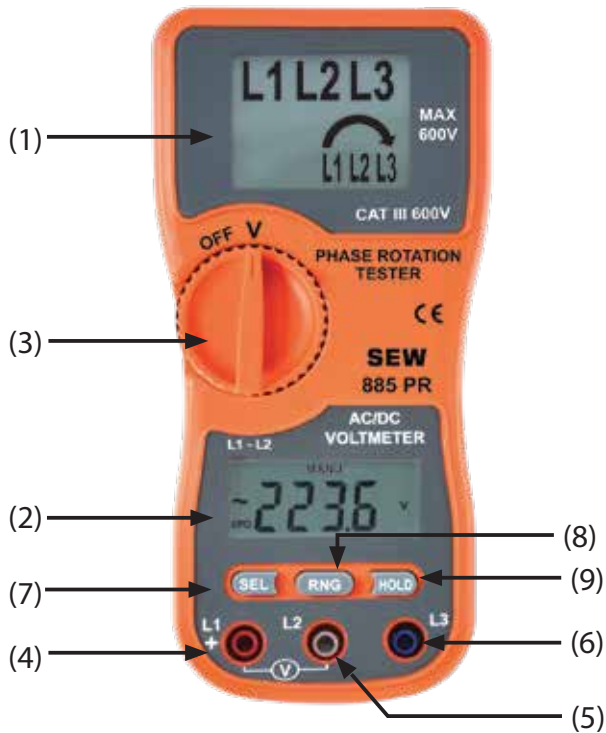

- |                            |                 |
|----------------------------|-----------------|
| (1) LCD for Phase Rotation | (6) L3 Terminal |
| (2) LCD for Voltmeter      | (7) SEL Button  |
| (3) Rotary Switch          | (8) RNG Button  |
| (4) L1 Terminal            | (9) HOLD Button |
| (5) L2 Terminal            |                 |

