


# Changeover Switch 20A-125A

## Dimensional Drawing

### Reference Use Only

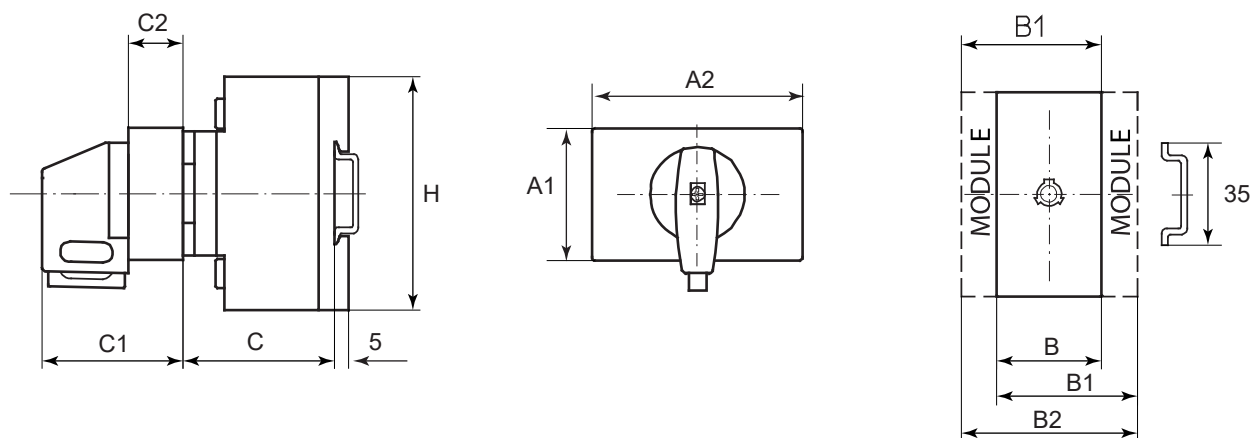

#### Setup of order code number

Type	Switching progr.	Mtg. form
H206	71300	128V1
Order code no.	H406-71300-128V1	

Types H216 / H220 / H226 / H233:

Mtg. form	A1	A2	B	B1	B2	C	C1	C2	H
026M1	45	76	72	84	96	40	51.5	25.5	70
027V1	45	76	72	84	96	40	51.5	25.5	70
028V1	45	76	72	84	96	40	51.5	25.5	70

Types B240 / B250 / B263:

Mtg. form	A1	A2	B	B1	B2	C	C1	C2	H
026M1	45	105	100	119	138	40	51.5	25.5	70
027V1	45	105	100	119	138	40	51.5	25.5	70
028V1	45	105	100	119	138	40	51.5	25.5	70

Types H406 / H408 / H410 / H412:

Mtg. form	A1	A2	B	B1	B2	C	C1	C2	H
126M1	45	72	140	159	178	67	48	16	80
127V1	45	72	140	159	178	67	48	16	80
128V1	45	72	140	159	178	67	48	16	80